


**Specifications:**

**HDS-S6116EXT**

**Front Panel**



**Rear Panel**

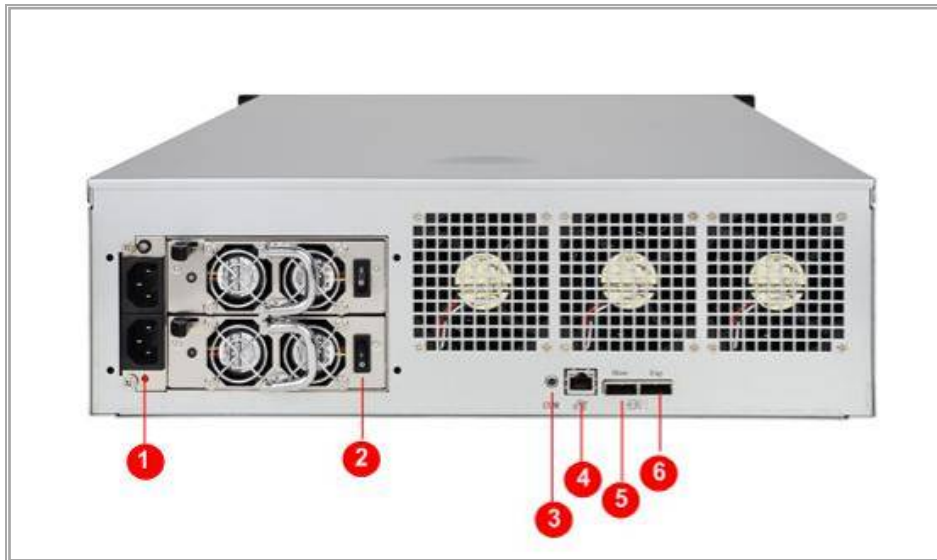

- ① Power Connection   ② Power switch   ③ Serial port   ④ NIC   ⑤ Host (UP) Interface  
⑥ EXP (Down) Interface

**HDS-S6224EXT**

**Front Panel**



## Rear Panel

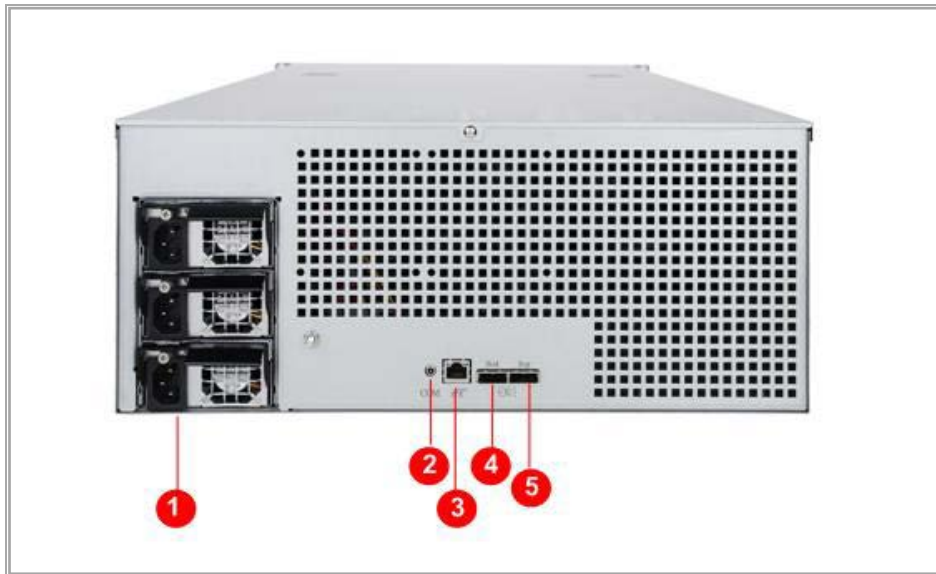


Figure 3-1 24 Slots Device Rear Panel

- ① Power Connection    ② Serial port    ③ NIC    ④ Host (UP) Interface    ⑤ EXP (Down) Interface

Model		HDS-S6116EXT	HDS-S6224EXT
Controller	SAS interface(up)	1(6Gbps)	
	SAS interface(down)	1(6Gbps)	
	Disk Array Channels	16	24
	HDD Interface	SATA,SAS	
	Hot-swap Disk	Supported	
	Bandwidth	24Gbps	
	Power	Redundant (1+1); 460W	Redundant (2+1); 760W
Environment	Temperature	5°C-40°C	
	Humidity	20%-80%	
Accessories	Mini SAS wire		
	Size (width*height*length)	440mmx132mmx480mm (3U)	440mmx177mmx710mm (4U)
	Net Weight	15Kg	25Kg