


# HƯỚNG DẪN

# GHI HÌNH CAMERA IP TRÊN Ổ CỨNG MÁY TÍNH


# 1. Tạo tài khoản mới trên Window

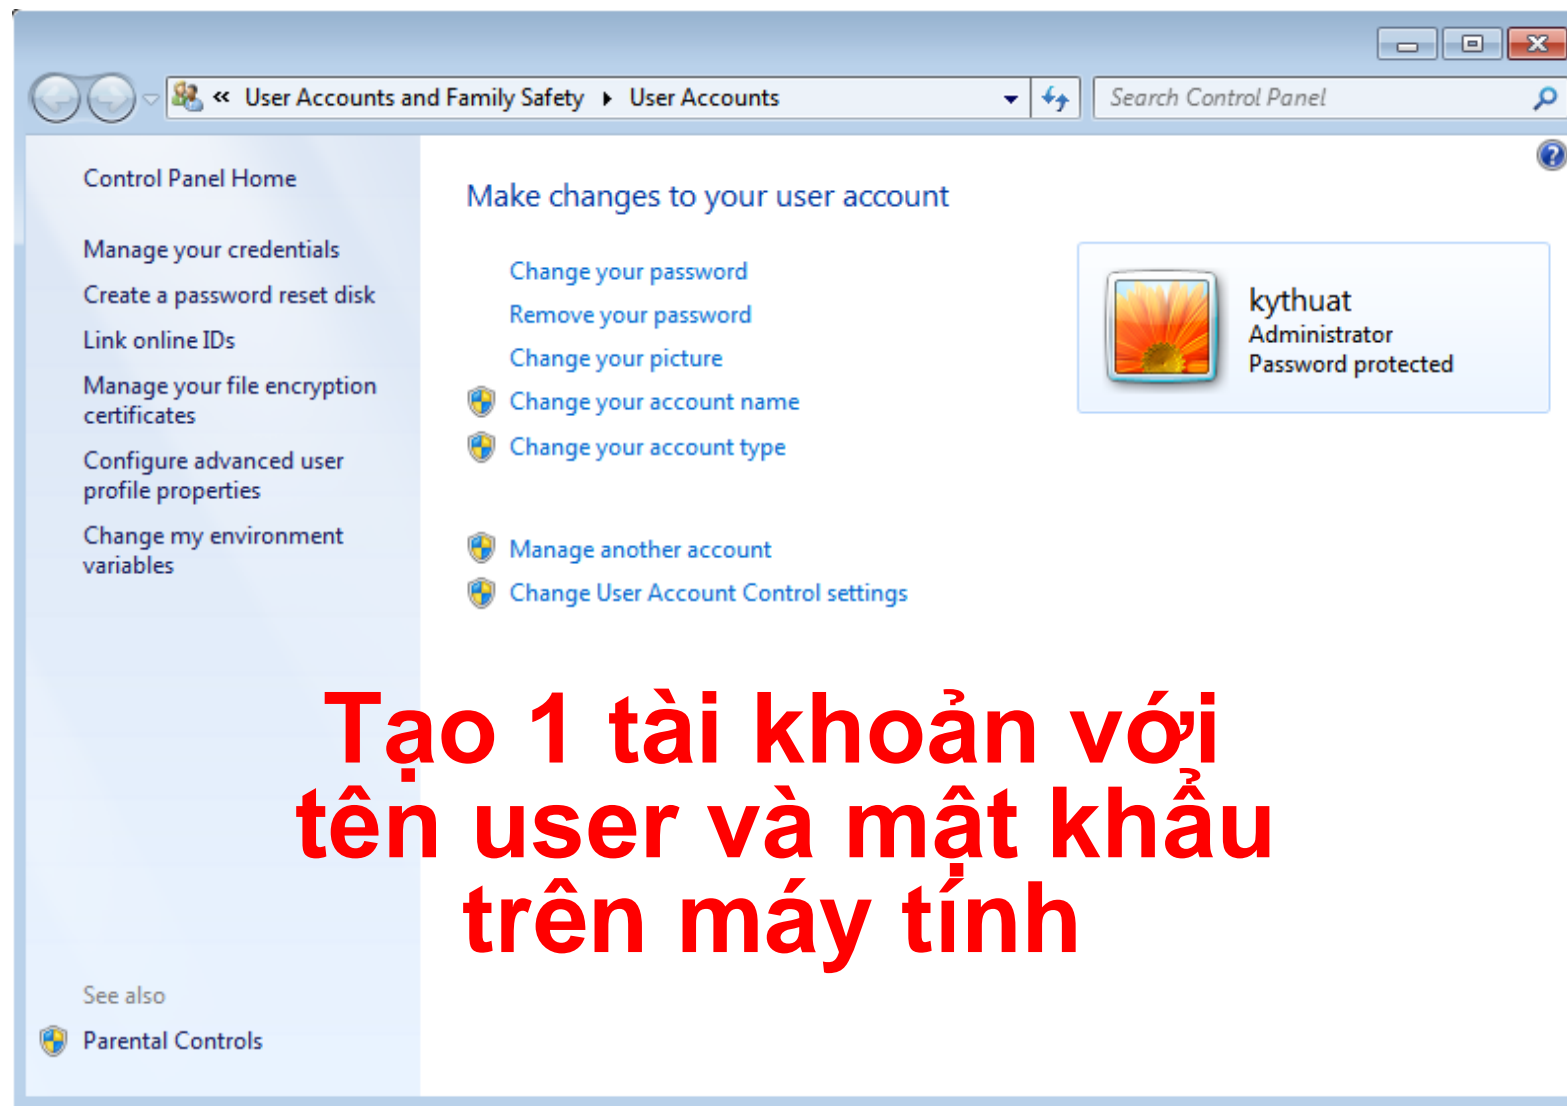

**Tạo 1 tài khoản với  
tên user và mật khẩu  
trên máy tính**


## 2. Tạo 1 ổ cứng riêng trên máy tính

**Chọn 1 ổ để  
lưu trữ**

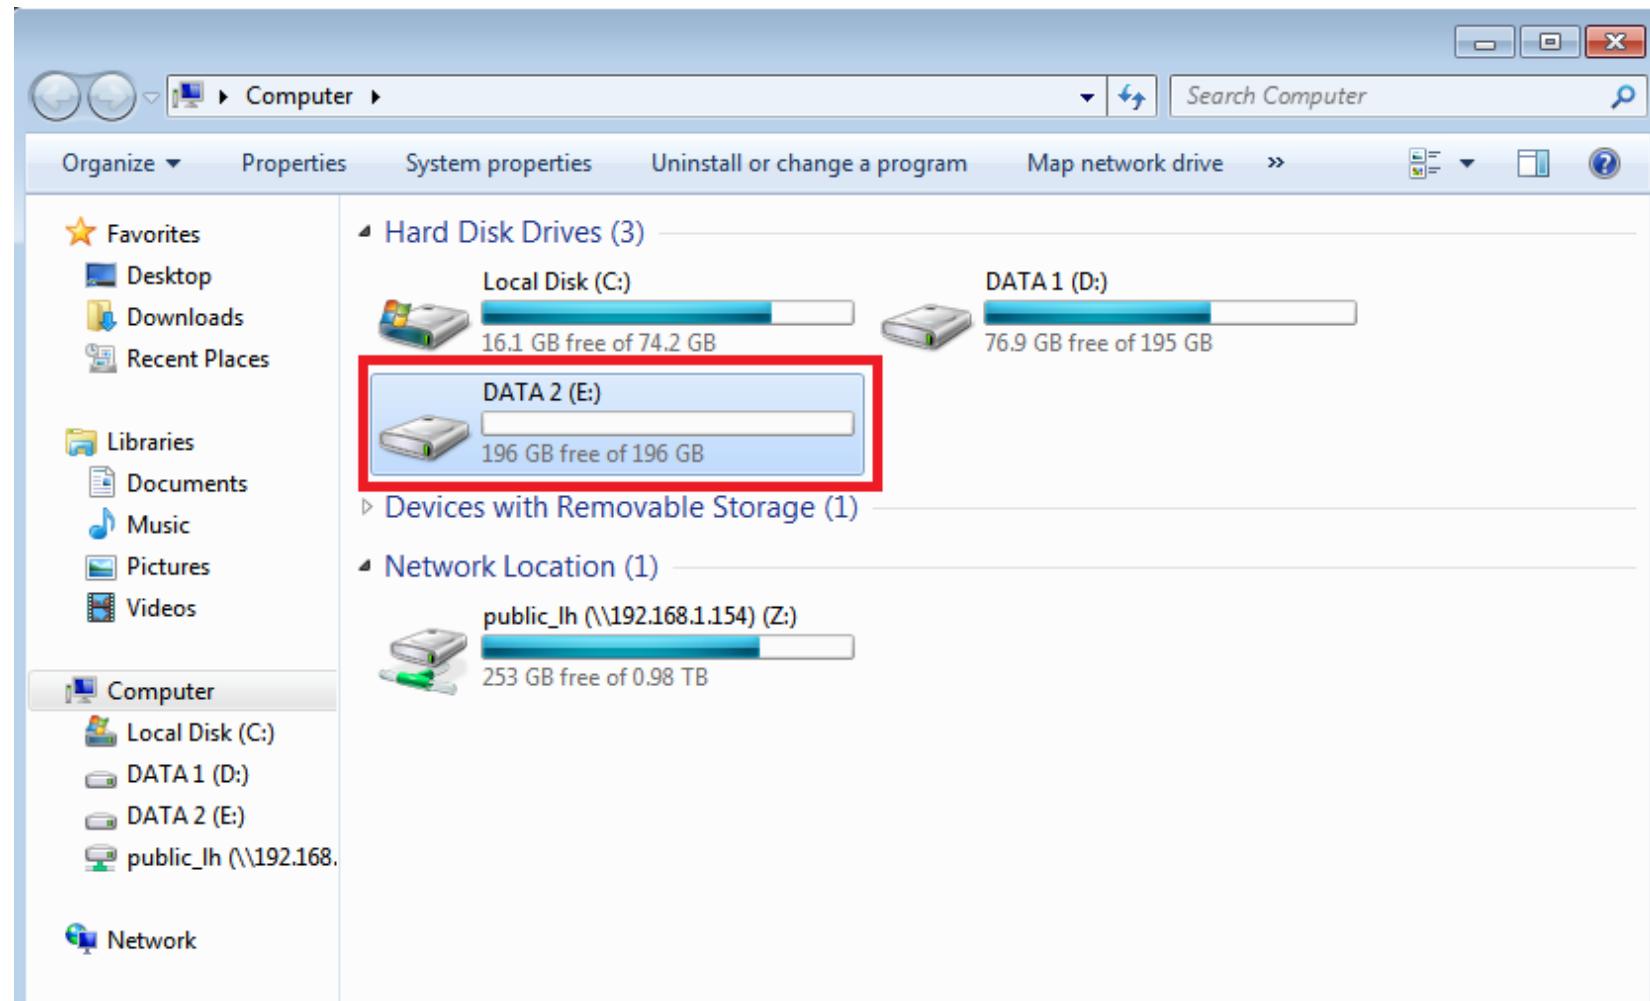


# 3. Tạo 1 thư mục trong ổ cần lưu trữ và Share cho tài khoản đã tạo

- Tạo 1 Folder ví dụ như: **luutrucam**
- Nhấp chuột phải chọn **Properties**

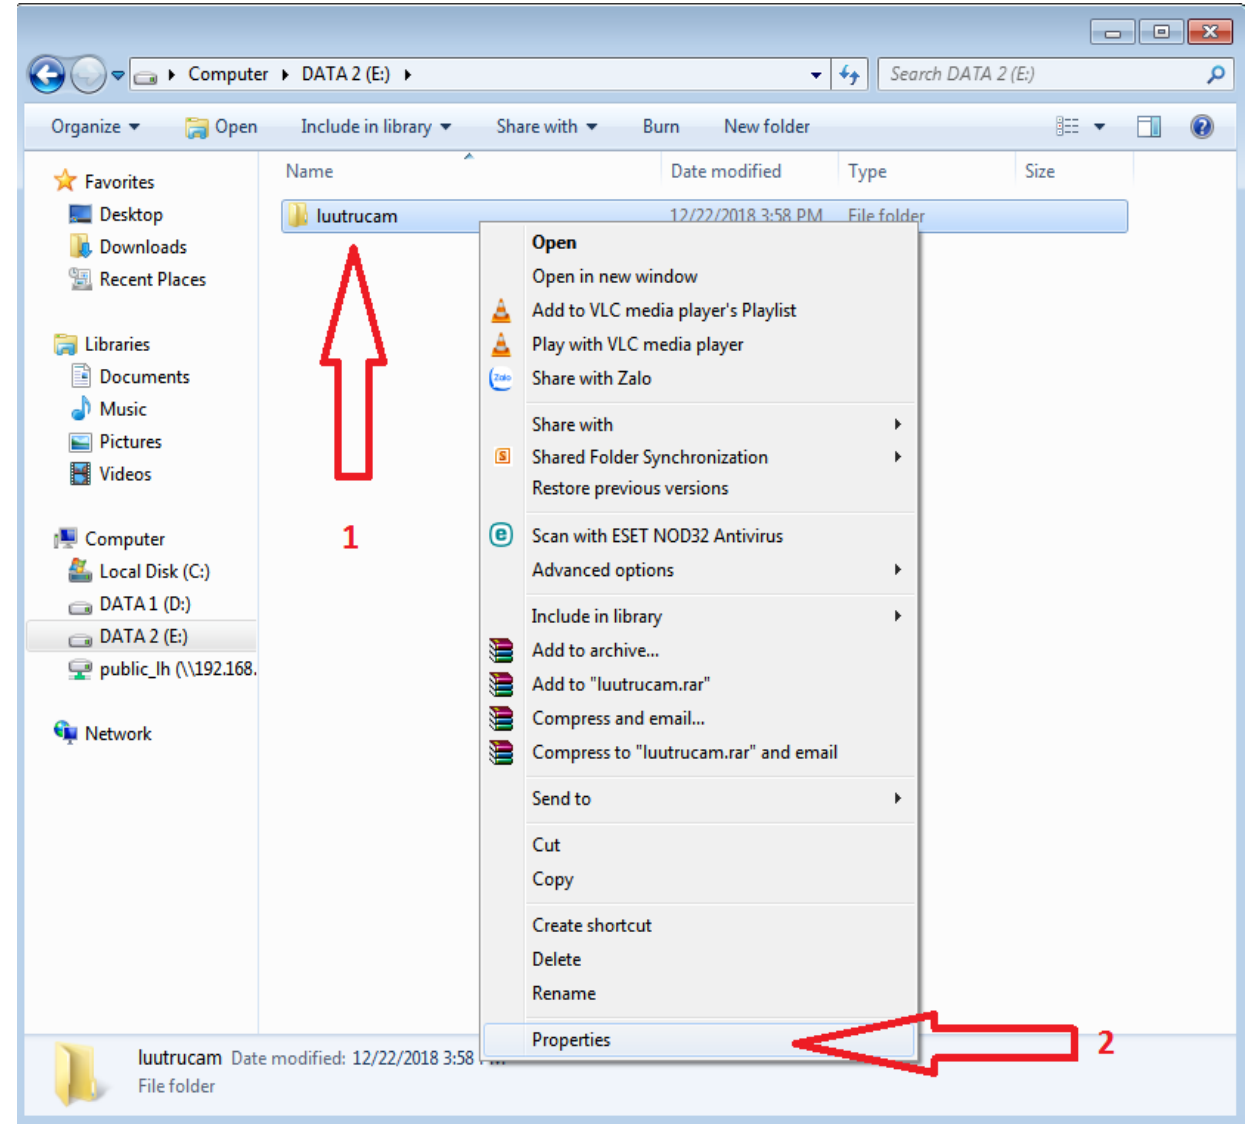


# 4. Share thư mục cho tài khoản

- > Chọn Sharing
- > Share
- > chọn user
- > chọn Share

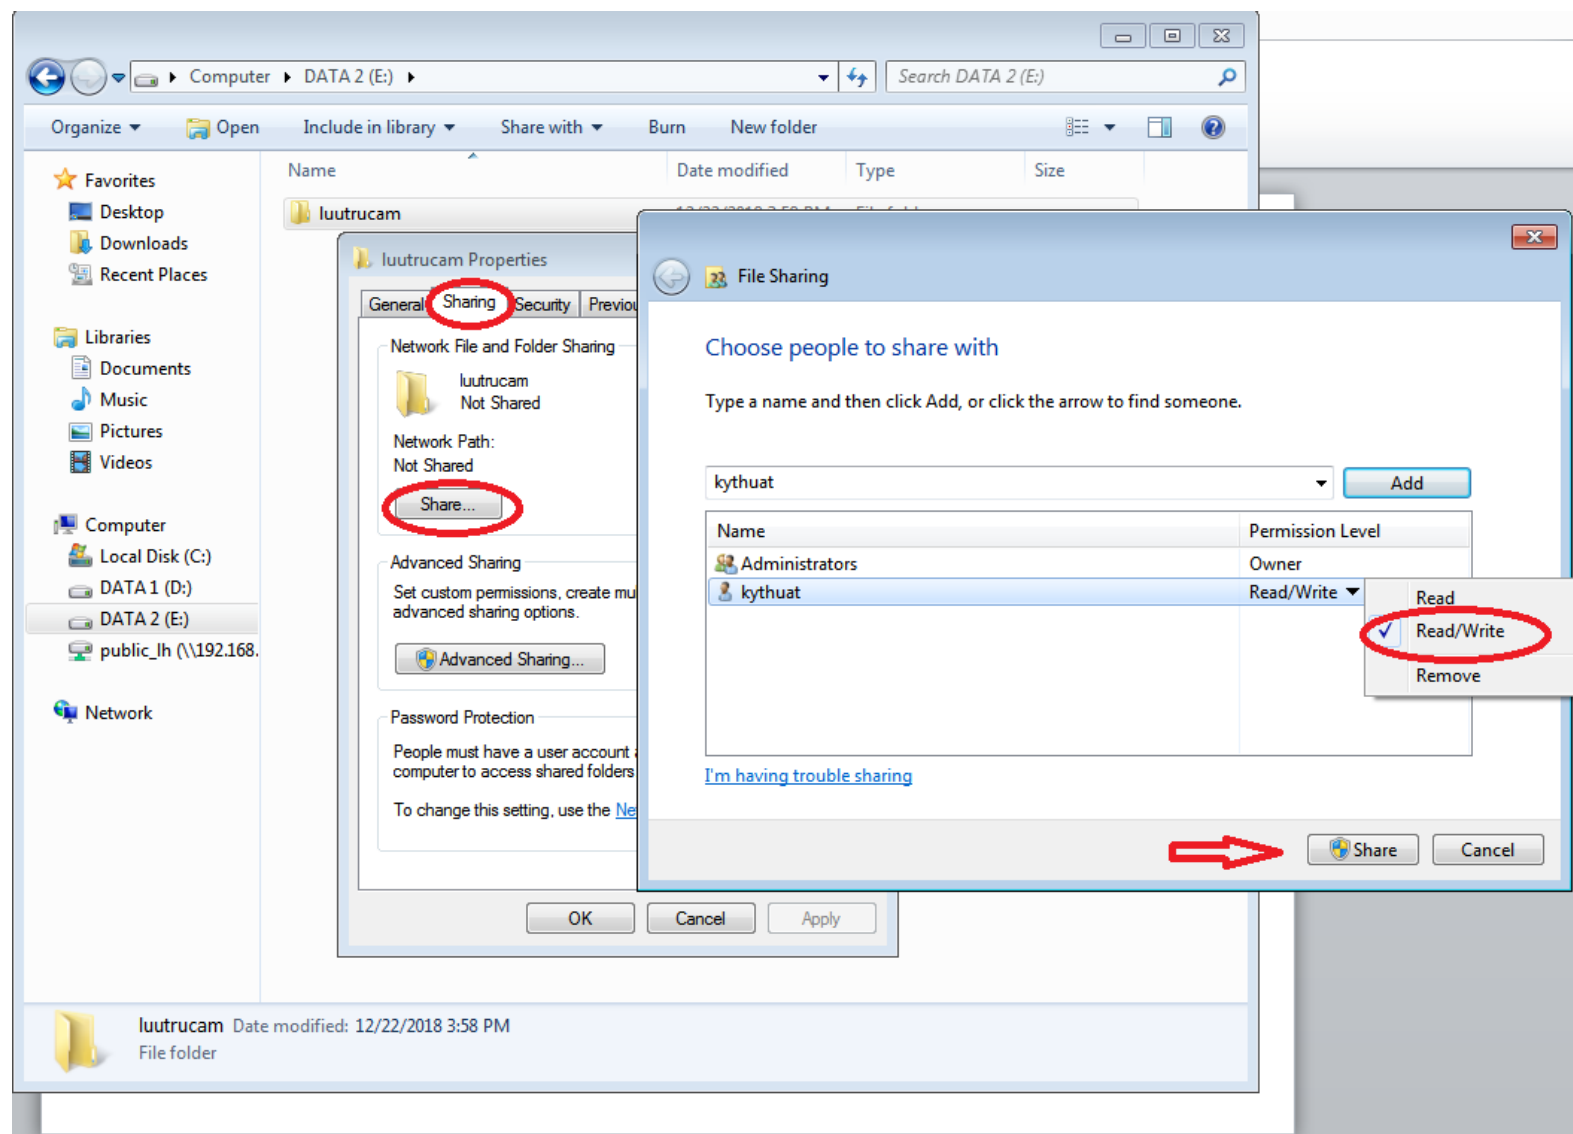

# Chọn Done để hoàn thành chia sẻ

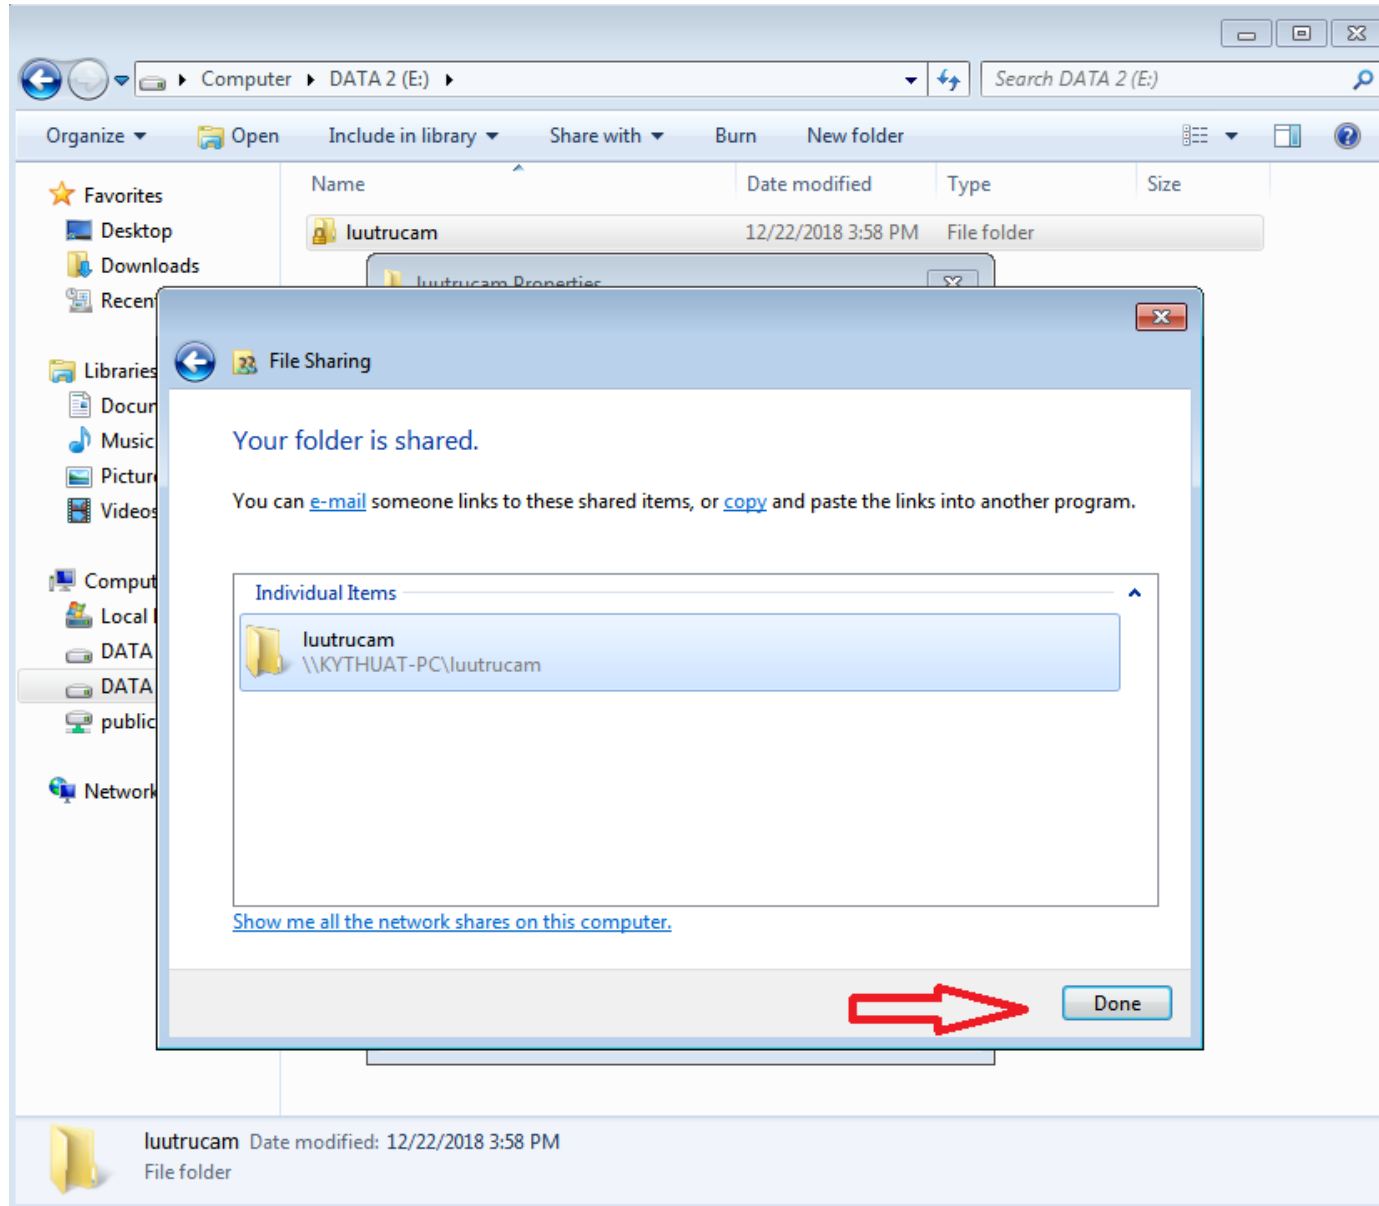

# 5. Cấu hình ổ cứng trên camera IP

Live View Playback Picture **Configuration**

HDD Management **Net HDD** Ip máy tính Folder lưu trữ

Net HDD				
HDD No.	Server Address	File Path	Type	Delete
1	192.168.1.216	Vuutrucam	NAS	×

Mounting Type  User Name  Password   **cuối cùng chọn Test**

2			NAS	×
3			NAS	×
4			NAS	×
5			NAS	×
6			NAS	×
7			NAS	×
8			NAS	×

**User máy tính** **pass máy tính**

**save lại**

Local System Network Video/Audio Image Event Storage Schedule Settings **Storage Management**

# 6. Format định dạng ổ cứng

Live View   Playback   Picture   **Configuration**

**HDD Management**   Net HDD

Local  
System  
Network  
Video/Audio  
Image  
Event  
Storage  
Schedule Settings

**Storage Management**

**HDD Management** Format

<input checked="" type="checkbox"/>	HDD No.	Capacity	Free space	Status	Type	Property	Progress
<input checked="" type="checkbox"/>	1	196.22GB	0.00GB	Uninitialized	NAS	R/W	

Quota



# Format Thành công – Camera đã nhận ổ cứng


Live View   Playback   Picture   **Configuration**

**HDD Management**   Net HDD

Local  
System  
Network  
Video/Audio  
Image  
Event  
Storage  
Schedule Settings  
**Storage Management**

**HDD Management** Format

<input type="checkbox"/>	HDD No.	Capacity	Free space	Status	Type	Property	Progress
<input type="checkbox"/>	1	196.22GB	194.00GB	Normal	NAS	RW	

  
ok

Quota

# 7. Kiểm tra đặt lịch ghi hình của camera

Live View   Playback   Picture   **Configuration**

**Record Schedule**   Capture

Enable

Continuous  Delete  Delete All Advanced

Day	0	2	4	6	8	10	12	14	16	18	20	22	24
Mon	[Continuous]												
Tue	[Continuous]												
Wed	[Continuous]												
Thu	[Continuous]												
Fri	[Continuous]												
Sat	[Continuous]												
Sun	[Continuous]												

Legend: [Blue] Continuous, [Green] Motion, [Orange] Motion | Alarm, [Purple] Event

# 8. Camera đã ghi hình

## Xem lại Trực Tiếp Trên Cam

The screenshot displays a camera playback interface. At the top, there is a navigation bar with tabs for 'Live View', 'Playback' (which is active), 'Picture', and 'Configuration'. On the right side of the navigation bar, there are links for 'admin', 'Help', and 'Logout'. Below the navigation bar, the main video area shows a street scene with several motorcycles parked on the sidewalk. A person in a blue jacket is visible near the motorcycles. The video timestamp is '12-22-2018 Sat 16:32:38'. The text 'IP Camera21' is overlaid on the bottom right of the video. To the right of the video, there is a calendar for December 2018, with the 22nd highlighted. Below the calendar is a search bar with the text 'Search'. At the bottom of the video area, there is a playback control bar with buttons for play, stop, and other functions. A red arrow points to the word 'Dữ liệu' (Data) in the playback control bar. Below the playback control bar, there is a timeline showing the time from 11:00 to 22:00, with a red arrow pointing to the specific time '2018-12-22 16:32:37'.

Channel No.: 1

Status: 1Speed

12-22-2018 Sat 16:32:38

IP Camera21

Dec 2018

Sun	Mon	Tue	Wed	Thu	Fri	Sat
25	26	27	28	29	30	1
2	3	4	5	6	7	8
9	10	11	12	13	14	15
16	17	18	19	20	21	22
23	24	25	26	27	28	29
30	31	1	2	3	4	5

Search

Set playback time

00 : 00 : 00

2018-12-22 16:32:37

Dữ liệu

**Chúc các bạn  
thành công**

*Thank you!*